



Alabama State Port Authority
First Addendum

Project Name: ICTF Drainage Cured in Place Liner
Location: Mobile, AL
Project # : 10765 **TASK # :** 2 **April 2021**

First Addendum

ICTF Drainage Cured in Place Liner

April 21, 2021



Alabama State Port Authority
First Addendum

Project Name: ICTF Drainage Cured in Place Liner
Location: Mobile, AL
Project # 10765 **TASK #** 2 **April 2021**



1. The bid submittal deadline is extended to May 7, 2021 at 2:00 p.m. The bid opening will take place May 7, 2021 beginning at 2:00 p.m. in the Killian Room at the same address indicated in the Bid Advertisement.

2. The first sentence of section SP-03, Division III of the project specification shall be replaced with the following: "The Contractor will be required to commence work under this contract in accordance with DIVISION IV GENERAL PROVISIONS Article 90-02 (NOTICE TO PROCEED), to prosecute said work with faithfulness and energy, and to complete the entire project within 180 calendar days after receipt of Notice to Proceed."
Likewise, the Bid Advertisement in Division I of the project specifications shall be amended to allow 180 calendar days for project completion.


3. Questions/Clarifications:
 - a. The contractor shall only be allowed to disrupt the storm water flow of a maximum three (3) existing storm pipes at any time during construction activities to allow for adequate capacity during rainfall events occurring during the project. The Contractor's plan for dewatering the existing pipes shall be submitted to the Owner for review and be subject to the Owner's approval.
 - b. Over the Hole installation process for the CIPP Liner is allowed for this project in lieu of an offsite wet-out facility. The contractor shall be solely responsible for providing all necessary equipment/labor/materials required for this installation procedure.

4. Installer/Manufacturer Pre-Qualifications:
Pre-Qualification Submittals were received from the following and are approved:
 - i. Insituform
 - ii. Suncoast Infrastructure, Inc.
 - iii. Granite Inliner, LLC

5. Drawing C100, Rev 0 shall be replaced with Drawing C100, Rev 1 attached herewith. Existing conditions include concrete truck lanes at Sta 1+50, Gantry crane at 6+00, rail tracks at 6+50, rail tracks at 8+00 and a berm at 9+25.

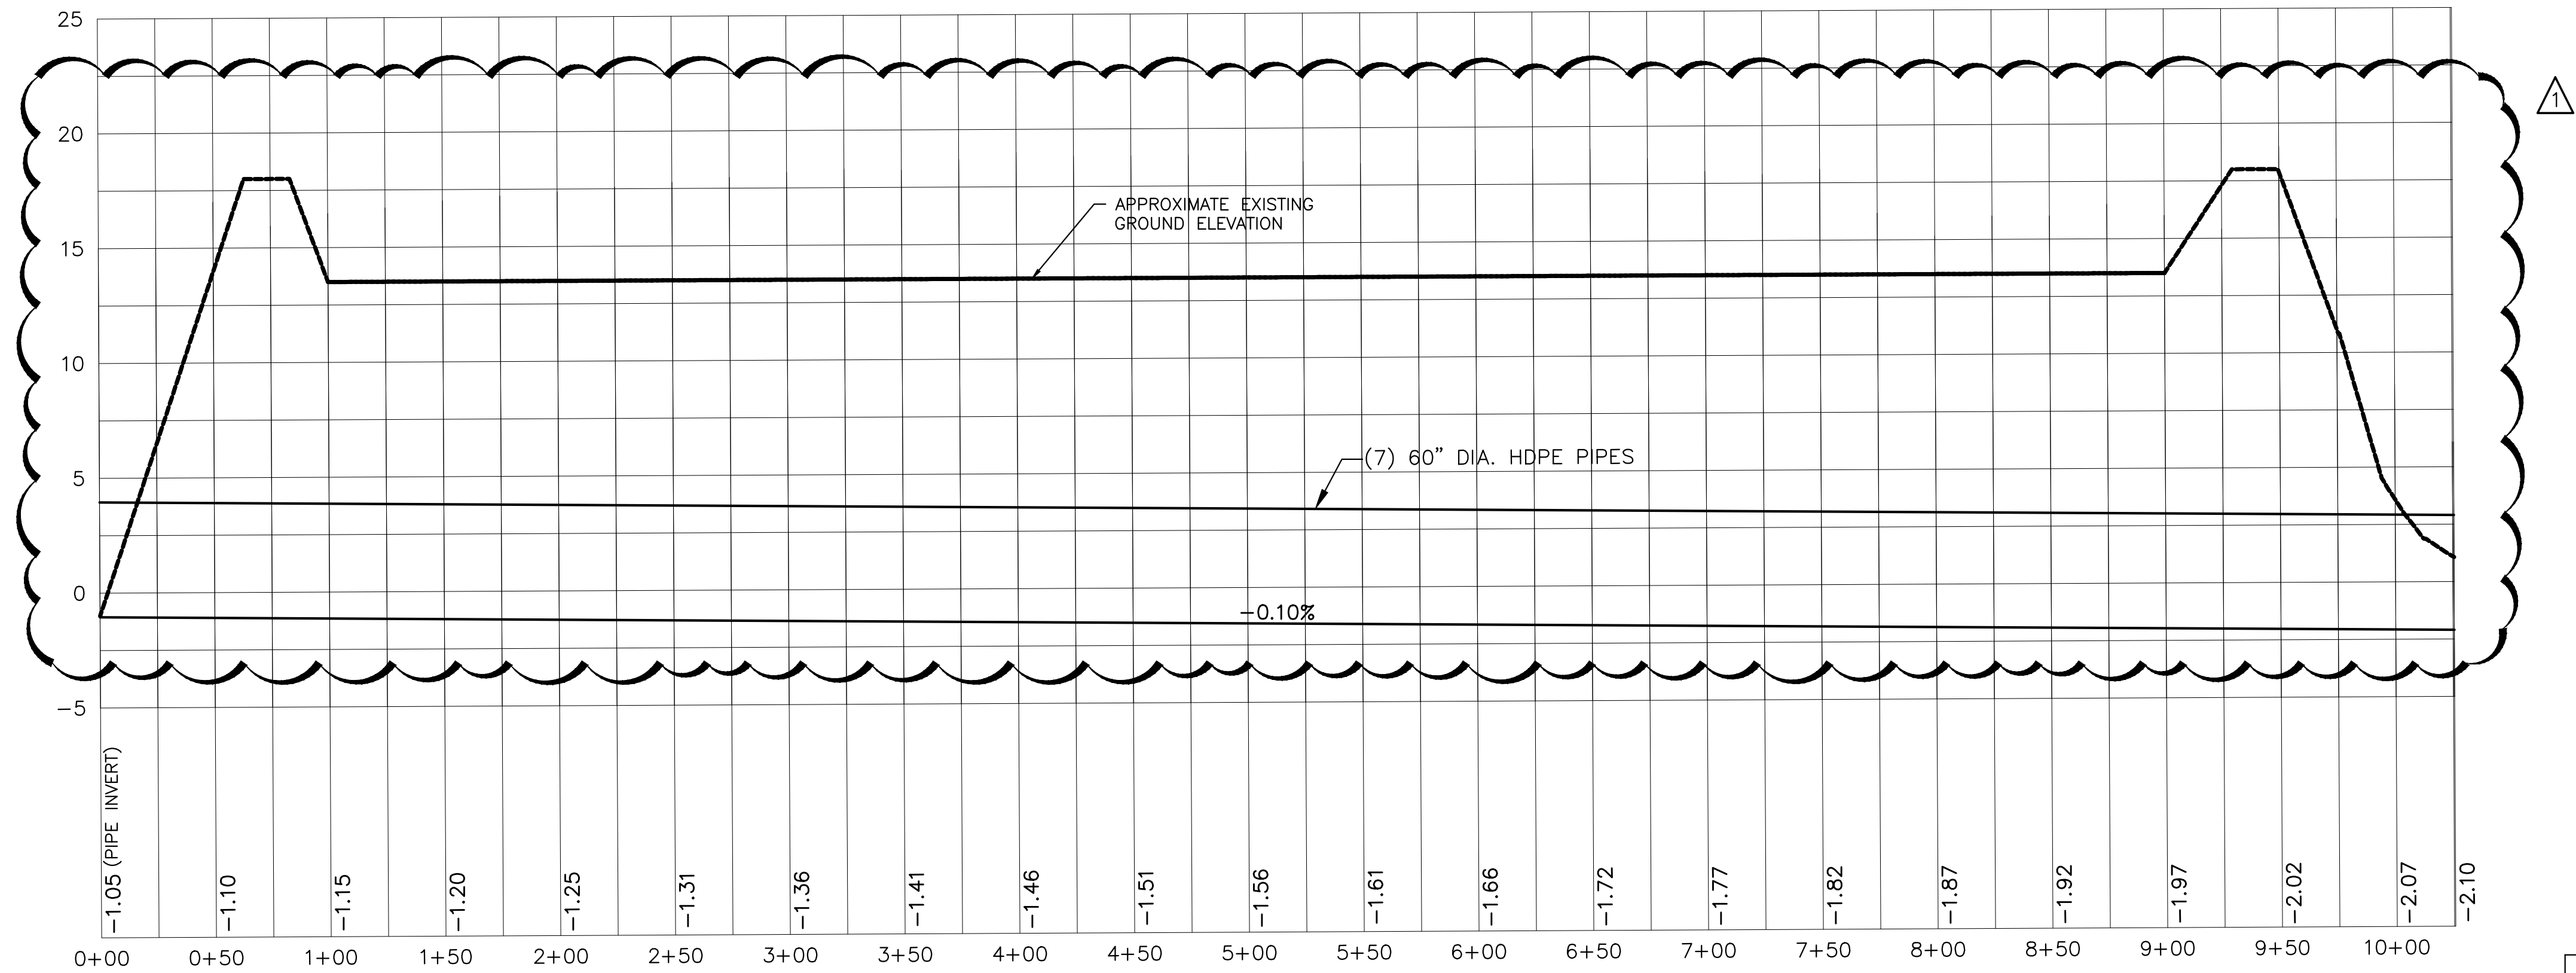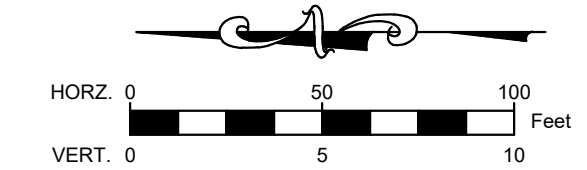

ISSUE FOR BID

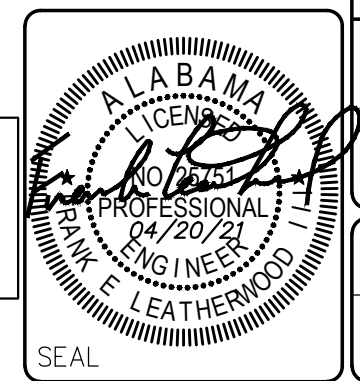

1	REV. EXISTING GROUND ELEVATIONS	04/20/21	FEL
0	ISSUE FOR BID	03/01/21	FEL
Mark	Description	Date	Appr.

ALABAMA STATE PORT AUTHORITY
MOBILE, ALABAMA
PROJECT NO. 10765 TASK NO. 01

thompson ENGINEERING 2970 COTTAGE HILL ROAD, SUITE 190
MOBILE, ALABAMA 36606
(251)666-2443

ICTF FACILITY DRAINAGE - CIP LINER

EXISTING CONDITIONS & REQUIRED LINING PLAN

Date:	03/01/21	Designed by:	FEL	Drawn by:	FEL	TE Job No:	21-1101-0015	Sheet No.	C100	Rev.	1
Ckd by:	FEL	Reviewed by:	LJG	Submitted by:	SKH	Plot scale:	1" = 50'	Drawing 1 of 4			